


# 用KIMOTO独自技术开发 遮光膜 CARBONFEATHER™

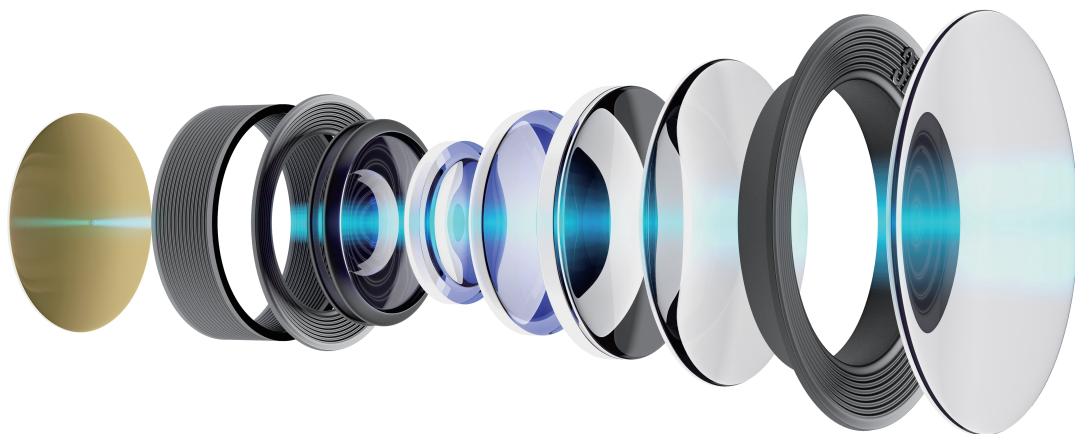

## 特点

- 已通过125℃可靠性试验的高耐热性
- 防静电性能

## 结构

|      |
|------|
| 遮光层  |
| 耐热基材 |
| 遮光层  |

|           | 单位    | CX016           | CX022           | CX030           | CX042           | CX722                                  | CX724                                  |
|-----------|-------|-----------------|-----------------|-----------------|-----------------|----------------------------------------|----------------------------------------|
| 总厚        | [μm]  | 16              | 22              | 30              | 42              | 22                                     | 24                                     |
| 光泽度(60°)  | [%]   | 0.5             | 0.5             | 0.7             | 0.7             | A 0.5<br>B 0.8                         | A 0.5<br>B 0.9                         |
| 光学浓度      | —     | 4.9             | ≥5.7            | ≥5.7            | ≥5.7            | >5.0                                   | >5.0                                   |
| 表面粗糙度(Ra) | [μm]  | 0.4             | 0.4             | 0.4             | 0.4             | A 0.4<br>B 0.5                         | A 0.4<br>B 0.5                         |
| 表面电阻率     | [Ω/□] | 10 <sup>4</sup> | 10 <sup>4</sup> | 10 <sup>4</sup> | 10 <sup>4</sup> | A 10 <sup>4</sup><br>B 10 <sup>5</sup> | A 10 <sup>4</sup><br>B 10 <sup>5</sup> |

※记载的值是测量值，不是保证值。

## 适用于所有相机上的用途



智能手机  
数码相机



车载摄像机



运动摄像机




光学仪器  
(显微镜、内窥镜)



笔记本电脑  
平板电脑



数码相机  
摄像机



监控摄像机



无人机

# KIMOTO

